

Setup · Installation Manual

ELECTRIC PROJECTION SCREEN

(Please be sure to read the manual carefully before use)

Service email: Service@jwstmb.com

Security Considerations


In order to ensure that your personnel safety, please be strictly followed.

Notes before start the installation or in installing

- To ensure electric projection screen performance and avoid unnecessary troubles, don't install the product in the place listed below:
 - sever vibration and shocks area
 - area close to magnetic fields, heat, steam, oil smoke
 - area opposite to air conditioner vent
- The physical structure and quality meet installation requirements.
- To avoid scratching screen, before start the installation, please carpet over the floor.
- Tightening the screws to prevent it coming loose. Don't install it without screw.
- In installing, be safe of your surroundings.
- Try to install it in a horizontal position.




The intensity of wall must be strong enough to carry this product including its spec and weight. otherwise, it may result in product falling off.

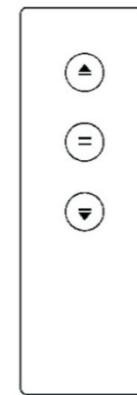

Remote control × 1




self-tapping screw × 8




expansion screws × 8



debugging rod × 1




slide pendant × 2

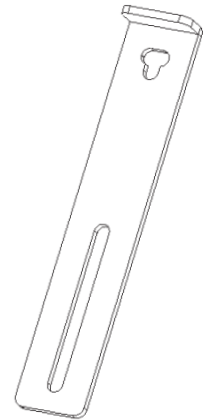

the fixed plate × 2

Before switching on the power, the lower fixed plate must be dismantled.



fabric × 1

Notes for use

- In order to improve the projection effect, special processing is carried out on the surface. If the curtain surface is polluted, the injury and the like will affect the projection and projection effect. On the basis of paying attention to the above two points, please try to use the product as small as possible.
 - Do not touch the screen surface
 - Do not scrawl or paint
 - Do not use the solid object rub or scratch the surface
 - Dust the surface with a dry and soft cotton cloth or soft brush



WARNING

Screen surface is forbidden to use cloth stained with water, gasoline and so on, or it will affect the projection effect.


※When using the product for the first time, it may give of unpleasant odor, so you can open the door and windows to permit natural ventilation, then the odor will be disappeared slowly.

WARNING



Do not erect the foot of the outer frame
Improper placement can cause damage and casualties.


① Projection Screen Installation method

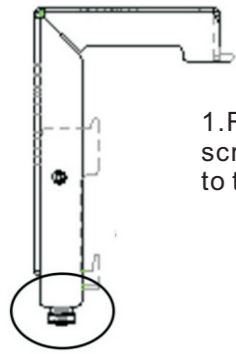


1. Rotate the screw anti-clockwise to back off the screw. Make the small blue metal plate to slip to the bottom.

2. No matter what kind of installation method you choose, please verify the height, distance and the central position to be projected on according to the measurement of the installation place. The screen must be installed in a horizontal position, please use a pencil to make a horizon line/mark, then punch holes and put the plastic screw pipe into the holes, be sure the end of the plastic screw pipe can't be extending outside the wall.


① Punch holes in the wall or ceiling as required.

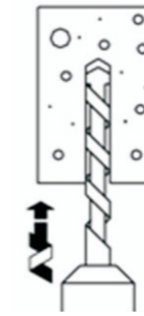


② Tighten the expansion bolts in pre-punched holes.




3. There are four installation methods, after tightening the expansion bolts in pre-punched holes, fix the hanger on the wall with 4 M5.5 self-tapping screws.

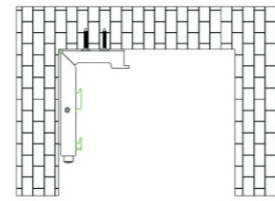


Ceiling Mounted View



Wall Mounted View

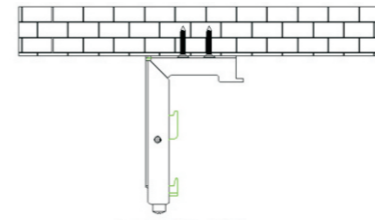


Top mounted view

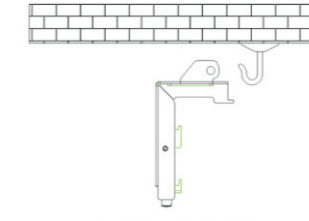

Hook-type mounted view


② Pendant installation method

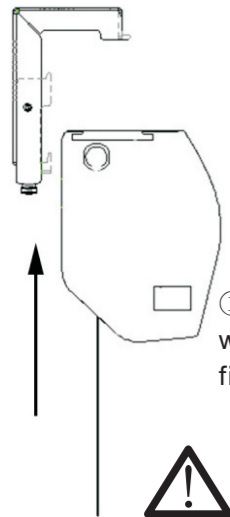


① Lift the electric silver screen with hands and hang it on the fixed pendant



before hanging it, the lower fixed plate must be dismantled.

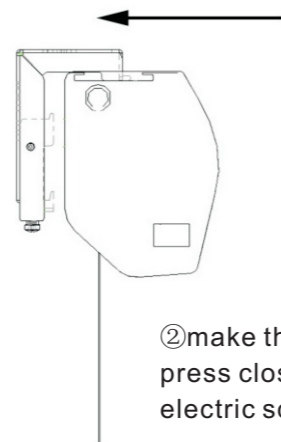


② make the hook on the hanger press close the top of the electric screen

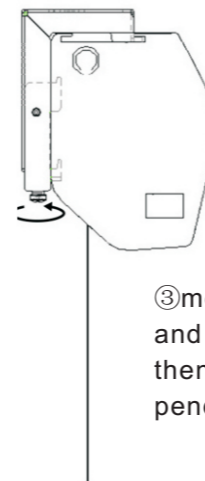

③ move the electric screen left and close to the pendant, and then tighten the screws on the pendant clockwise.

Remote control

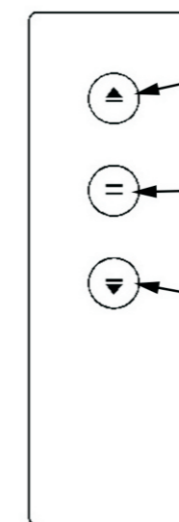

Up-button

Stop button

Down button

1. while using projector screen

Press **DOWN** button, please verify if it's the stop position you desired.

2. after using projector screen

Please press **UP** button, when the screen goes up completely, press **STOP** button.

3. while stopping the screen

Please press **STOP** button, the active screen will stop automatically.

Screen Down-to Position Change



Note: Note: the black border on the upper is designed according to the factory standard if you need to adjust down, please adjust under the guidance of the professional staff!

1. There's adjusting knob located at the bottom left of shell, take-off the white plastic cap to verify and confirm the adjusting knob.
※ Before start the adjustment, the screen must be down-to the bottom completely.


2. Insert the limit adjustment hole with the attached hexagonal wrench, rotate in the negative "-" direction and narrow the black in the positive "+" direction, (the initial state is not recommended). When adjusting according to the negative "-" direction, the remote controller should be used to press the upper and lower keys to confirm.

※ To avoid upward a lot, please adjust it little by little.


【Ref】 1/2 cycle is upward ~12.5mm

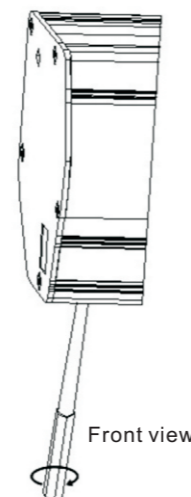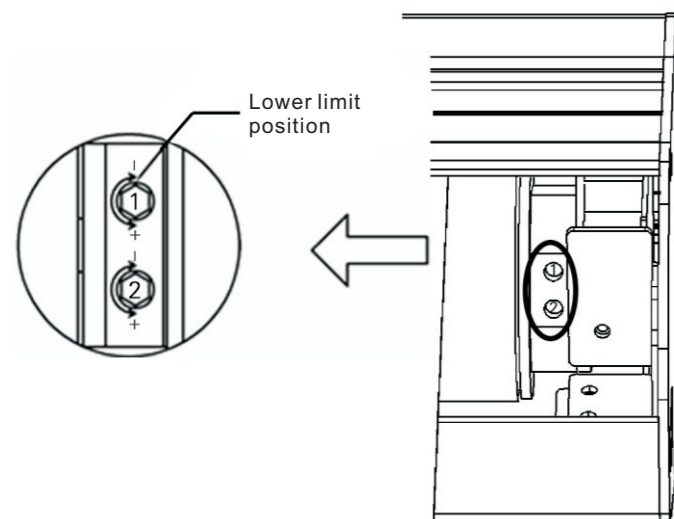


Front view

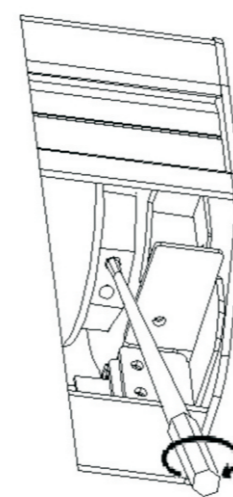

Back view

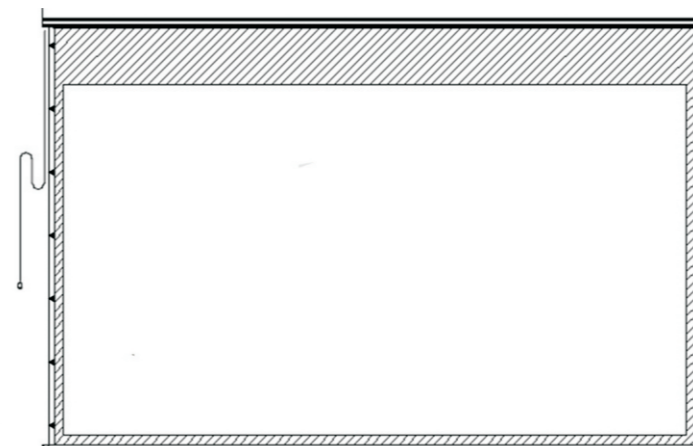

The area of upper black border is larger

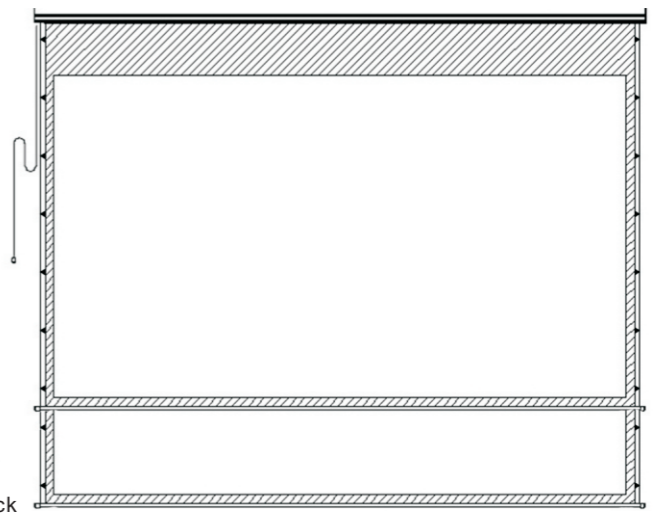

The desired stop position